

How to Order

PS 10 00 - R06 L - Q

Output specifications

10	For positive pressure
11	For vacuum and residual pressure
12	For vacuum

Option (CE-compliant*)

Nil	None
Q	CE-compliant

* The PS1200 series is CE-compliant (with Q) only.


Piping specifications

R06	ø6 reducer
R07	1/4" reducer

Lead wire length


L	3 m
----------	-----

Switch Specifications

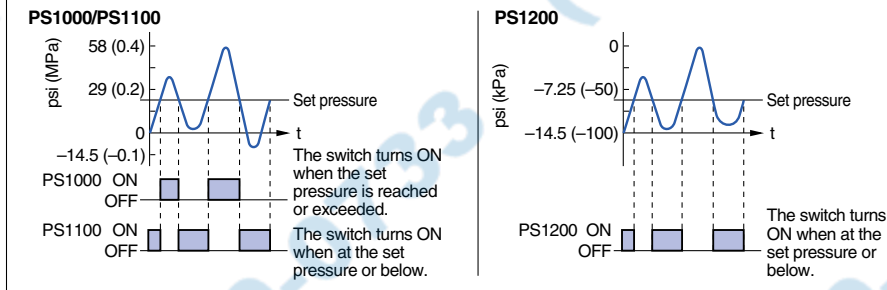

Setting of Pressure Switch

- Use the pressure setting trimmer to set ON pressure.
- Rotate clockwise to increase the set pressure. For setting vacuum, rotate counterclockwise.
- To set, use a flat head screwdriver suited for the groove of the trimmer, and rotate it lightly with finger tip.



Trimmer


Rotation angle of the trimmer is 220°.

There is a stop provided to prevent the trimmer from rotating beyond its limits. Rotation beyond the limit can damage the trimmer. Adjust the trimmer gently within the rotation angle.



Left end adjustment limit Right end adjustment limit

Dimensions

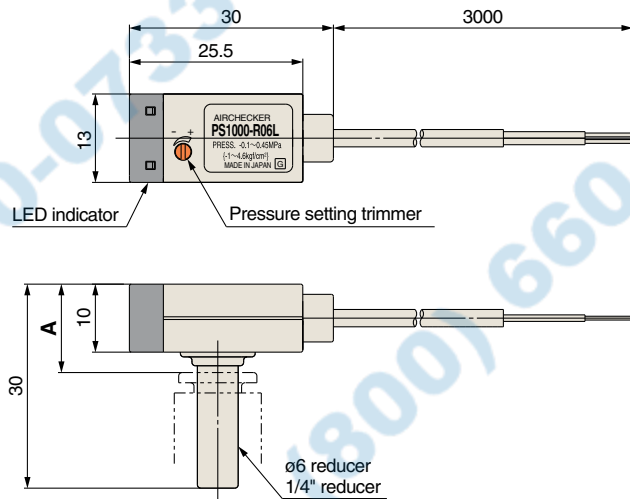

Dimensions

Applicable One-touch fittings	A
KQ2H/L/T/S/Y06-M5	16
KQ2H/L07-M5	16
Other Series KQ2/KS	13
Series KJ	16

Revision history

Edition B * Addition of PS1200 (For vacuum)

QS



SMC Corporation of America
10100 SMC Blvd., Noblesville, IN 46060

www.smcusa.com

SMC Pneumatics (Canada) Ltd.
www.smc Pneumatics.ca

(800) SMC.SMC1 (762-7621)

e-mail: sales@smcusa.com

For International inquiries: www.smcworld.com