

How to Order

ASD 3 30F — 01 06 S K

Body size

| | |
|---|--------------|
| 2 | M5 standard |
| 3 | 1/8 standard |
| 4 | 1/4 standard |
| 5 | 3/8 standard |
| 6 | 1/2 standard |

Type

| | |
|---|-----------|
| 3 | Universal |
|---|-----------|

With One-touch fitting

Thread type

| | |
|-----|----------------------------|
| Nil | Metric thread (M5) |
| | Unified thread (10-32 UNF) |
| N | R |
| | NPT |

Option

| | |
|-----|--------------------|
| Nil | None |
| K | Hexagonal lock nut |

With seal

Applicable tubing O.D.


| Metric size | | Inch size | |
|-------------|-----|-----------|--------|
| 04 | ø4 | 01 | ø1/8" |
| 06 | ø6 | 03 | ø5/32" |
| 08 | ø8 | 05 | ø3/16" |
| 10 | ø10 | 07 | ø1/4" |
| 12 | ø12 | 09 | ø5/16" |
| | | 11 | ø3/8" |

Bore size


| | |
|--------|-----------|
| M5 | M5 x 0.8 |
| U10/32 | 10-32 UNF |
| 01 | 1/8 |
| 02 | 1/4 |
| 03 | 3/8 |
| 04 | 1/2 |

Needle Valve/Flow Characteristics (Inlet Pressure: 0.5 MPa)


ASD230F

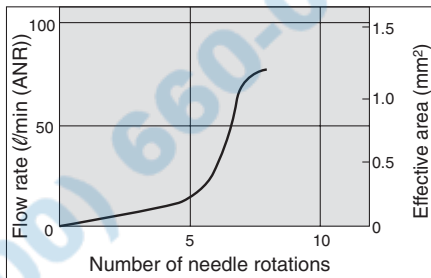


ASD330F

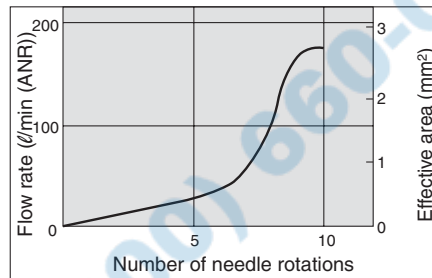


ASD430F

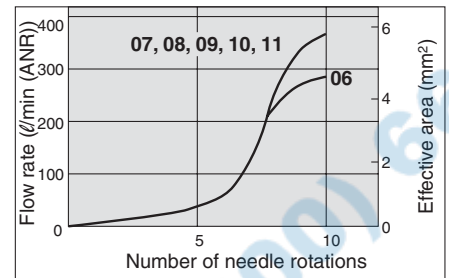

ASD530F

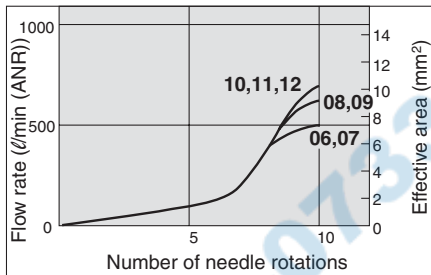

ASD630F

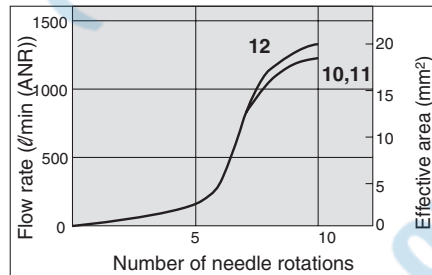

AS
ASP
ASN
AQ
ASV
AK
ASS
ASR
ASF