


ISO Standard Solenoid Valve: Size 1 Metal Seal/Rubber Seal, Single Unit Series VQ7-6

How to Order Valves

VQ7-6-FG S 3

Passage symbol

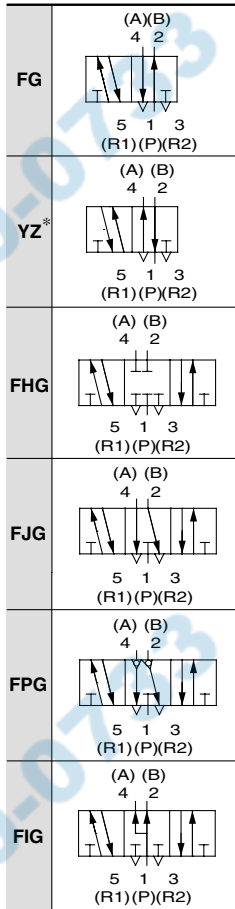

* Option **Number of solenoids**

S	Single
D	Double

Connector

Nil	DIN terminal block (With connector)
O	DIN terminal block (Without connector)
SC	Pre-wired connector

Sub-plate port size

Nil	Without sub-plate
A02	Side ported Rc 1/4*
A03	Side ported Rc 3/8
B02	Bottom ported Rc 1/4*
B03	Bottom ported Rc 3/8

* Port R is Rc 3/8

Thread type

Nil	Rc
F	G
T	NPTF

Seal

Nil	Metal seal
R	Rubber seal

Option

Nil	None
Z	Light/Surge voltage suppressor
V	Individual pilot exhaust

* When two or more symbols are specified, indicate them alphabetically.

Coil rated

1	100 VAC
2	200 VAC
3	24 VDC
4	12 VDC
9	Other voltages

* For other voltages, please contact SMC separately.

How to Order Sub-plate

VS7-1-A02

Port size

A02	Side ported RC 1/4*
A03	Side ported Rc 3/8
B02	Bottom ported Rc 1/4*
B03	Bottom ported Rc 3/8

* Port 3(R2) and 5(R1) are Rc 3/8

Thread type

Nil	Rc
F	G
T	NPTF

Specifications

Model	Piping location	Porting specifications		Weight (kg)
		1(P), 2(B), 4(A) port size	3(R2), 5(R1) port size	
VS7-1-A02	Side	1/4	3/8	0.37
VS7-1-A03		3/8		
VS7-1-B02	Bottom	1/4	3/8	
VS7-1-B03		3/8		