
Valve Mounted Cylinder/Non-rotating Rod Type: Double Acting

Series CV3K Non-lube Type: Ø40, Ø50, Ø63

Construction

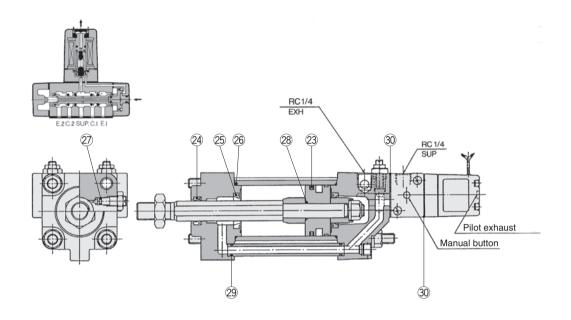

* The numbers are the same as the "Construction" of the Best Pneumatics No.3 Series CV3K.

Seal Kit List

ocal Itit Elot						
No.	Description	Material	Note			
23	Piston seal					
24	Rod seal					
25	Cushion seal	NBR	25 and 28 are non-replaceable parts, so they are not included in			
26	Cylinder tube gasket					
27)	Cushion valve seal	NDN				
28	Piston gasket		the seal kit.			
29	Pipe gasket					
30	Head cover gasket					

Disassembly/Replacement

1. Please consult with SMC when the rod seal is to be replaced.

When the rod seal is to be replaced, make sure that the seal's width across flats matches that of the non-rotating guide.

A rod seal may allow air leakage depending on the position where it is installed. Therefore, please consult with SMC when a rod seal is to be replaced.

2. Do not replace the non-rotating guide.

Since the non-rotating guide is press fitted, the entire cover assembly needs be replaced instead of a single part.

Replacement Parts: Seal Kit

	Bore size (mm)	Kit no.	Contents	
	40	CV3K40-PS	Set of left nos. 23, 24, 26, 27, 29, 30	
	50	CV3K50-PS		
63		CV3K63-PS	2, 4, 0, 0, 0, 0	

- * Seal kit includes 3, 4, 6, 7, 9, 3. Order the seal kit, based on each
- * Seal kit includes a grease pack (ø40, ø50: 10 g, ø63 or more: 20 g). Order with the following part number when only the grease pack is needed.

Grease pack part no.: GR-S-010 (10 g), GR-S-020 (20 g)