


Series 10-TCU Polyurethane coil tubing

For flexible tubing
Compact piping possible




Burst pressure characteristics curve and operating pressure

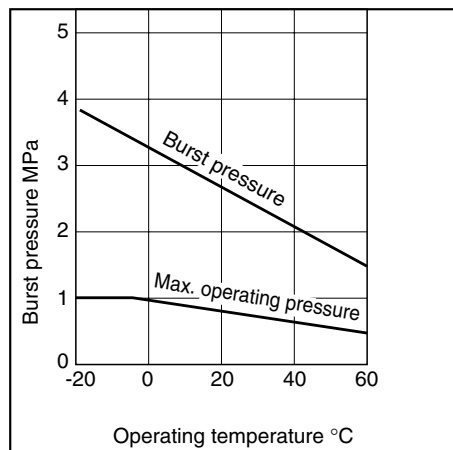

Specifications

Model	10-TCU 0425B-1	10-TCU 0425B-2	10-TCU 0425B-3	10-TCU 0604B-1	10-TCU 0604B-2	10-TCU 0604B-3	10-TCU 0805B-1
Number of cores	1	2	3	1	2	3	1
Tubing O.D. (mm)	4			6			8
Tubing I.D. (mm)	2.5			4			5
Fluid	Air						
Max. operating pressure (20°C)	0.8MPa						
Burst pressure	Refer to the burst pressure characteristics curve.						
Operating temperature	-20 to 60°C						
Material	Polyurethane						
Color	Black						
Particle generation grade (Please refer to front matters 13 to 22 for details.)	Grade 1						

Dimensions

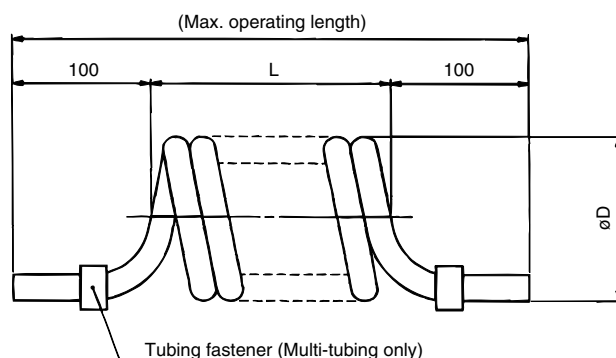

Specifications Model	Tubing size (mm)		Coil (mm)		Number of cores	No. of coil windings per tubing length	Max. operating length
	O.D.	I.D.	L	D			
10-TCU0425B-1	4	2.5	210	18	1	52	1.5
10-TCU0425B-2			280	28	2	35	
10-TCU0425B-3			265		3	22	
10-TCU0604B-1	6	4	325	24	1	54	2
10-TCU0604B-2			305	37	2	27	1.5
10-TCU0604B-3					3	17	1
10-TCU0805B-1	8	5	330	31	1	41	2