

How to Order

AS 2 2 0 1F - 01 - 06 S -

Body size

1	M3, M5 standard
2	1/8, 1/4 standard
3	3/8 standard
4	1/2 standard

Type

2	Elbow
3	Universal

Control type

0	Meter-out
1	Meter-in

With One-touch fitting

Thread type

Nil	Metric thread (M3, M5)
	Unified thread (10-32 UNF)
N	R
	NPT

Made to Order
(Refer to page 422 for details.)

Option

Nil	None
S	With seal
K	Hexagonal lock nut
N	Electroless nickel plated

*1 If more than one option is required, write option part numbers in the order of "S", "K", "N".

*2 M3, M5, and U10/32 are not available with seals.

Applicable tubing O.D.

Metric size	Inch size
02	ø2
23	ø3.2*
04	ø4
06	ø6
08	ø8
10	ø10
12	ø12
01	ø1/8"
03	ø5/32"
05	ø3/16"
07	ø1/4"
09	ø5/16"
11	ø3/8"
13	ø1/2"


*Use ø1/8" tube.

Port size


M3	M3 x 0.5
M5	M5 x 0.8
U10/32	10-32 UNF
01	1/8
02	1/4
03	3/8
04	1/2

Needle Valve/Flow Characteristics

AS1201F-M3, AS1211F-M3
AS1301F-M3, AS1311F-M3
AS1201F-M5-02, AS1211F-M5-02

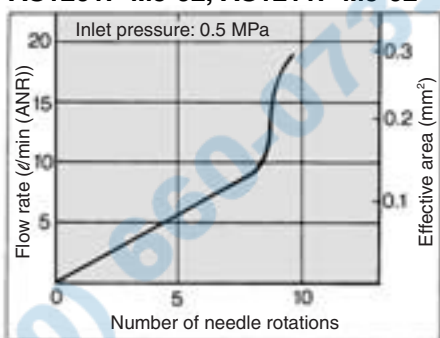


AS1201F-M5, AS1211F-M5
AS1301F-M5, AS1311F-M5

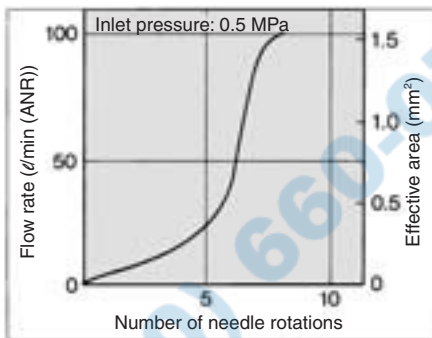


Note) "-U10/32" is the same as "M5".


AS2201F-01, AS2211F-01
AS2301F-01, AS2311F-01

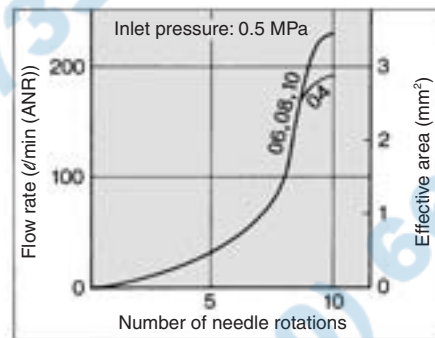


AS2201F-02, AS2211F-02
AS2301F-02, AS2311F-02

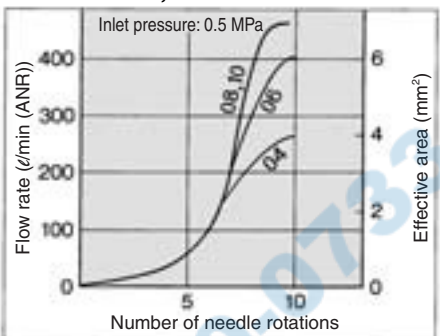

AS3201F, AS3211F
AS3301F, AS3311F

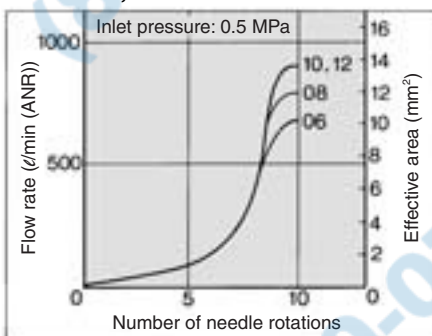

AS4201F, AS4211F
AS4301F, AS4311F

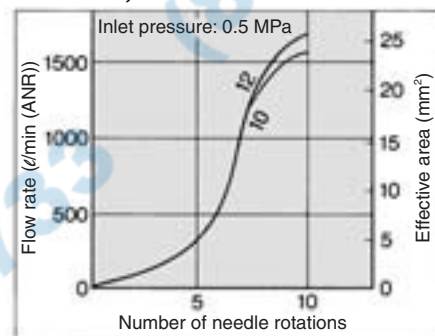

- AS
- ASP
- ASN
- AQ
- ASV
- AK
- VCHC
- ASS
- ASR
- ASQ
- KE
- TMH