

Series MBB


ø32, ø40, ø50
ø63, ø80, ø100



Construction

Locking at head end

Manual release non-locking type: N

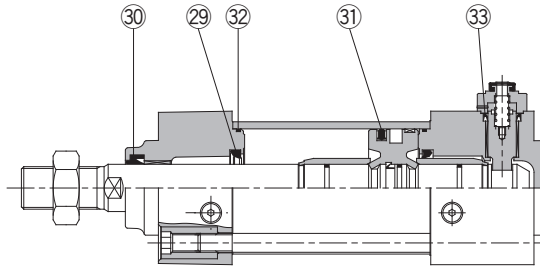

* The numbers are the same as the "Construction" of the Best Pneumatics No.2 Series MBB.

Seal Kit List

| No. | Description | Material | Note |
|-----|----------------------|----------|------|
| 29 | Cushion seal | Urethane | |
| 30 | Rod seal | NBR | |
| 31 | Piston seal | NBR | |
| 32 | Cylinder tube gasket | NBR | |
| 33 | Lock piston seal | NBR | |

Replacement Parts: Seal Kit

| Bore size (mm) | Kit no. | Contents |
|-----------------------------------|-------------|--|
| Locking at head or rod end | | |
| 32 | MBB32-PS | Set of left nos. 29, 30, 31, 32 and 33. |
| 40 | MBB40-PS | |
| 50 | MBB50-PS | |
| 63 | MBB63-PS | |
| 80 | MBB80-PS | |
| 100 | MBB100-PS | |
| Locking at both ends | | |
| 32 | MBB32-PS-W | Set of left nos. 29, 30, 31, 32 and 33. |
| 40 | MBB40-PS-W | |
| 50 | MBB50-PS-W | |
| 63 | MBB63-PS-W | |
| 80 | MBB80-PS-W | |
| 100 | MBB100-PS-W | |

- * Seal kits consist of items 29 to 33, and can be ordered by using the seal kit number corresponding to each bore size.
- * Trunnion type should not be disassembled.
- * Seal kit includes a grease pack (ø32 to 50: 10 g, ø63, 80: 20 g, ø100: 30 g).
Order with the following part number when only the grease pack is needed.
Grease pack part no.: GR-S-010 (10 g), GR-S-020 (20 g)

Actuators
Modular F.R.L. Pressure Control Equipment
Air Preparation Equipment
Industrial Filters
Replacement Procedure
Actuators
Modular F.R.L. Pressure Control Equipment
Industrial Filters